


PRODUCT IDENTIFICATION

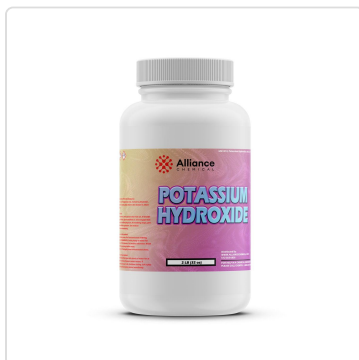

Product Name: Potassium Hydroxide (KOH)

CAS Number: 1310-58-3

Molecular Formula: HKO

Molecular Weight: 56.106 g/mol

Grade: Technical Grade

Purity / Concentration: Not Available

Synonyms: Caustic Potash, Potash Lye

PRODUCT OVERVIEW

Potassium Hydroxide, also known as Caustic Potash, is a high-purity technical grade solid available as a white crystalline powder with an 86.5% assay. This versatile strong base is essential for industrial processes requiring precise pH control and chemical synthesis.

Grade Significance: Technical Grade ensures a reliable balance between high purity and cost-effectiveness, making it suitable for standard industrial and manufacturing applications where stringent analytical standards are not required.

CERTIFICATE OF ANALYSIS — TYPICAL VALUES

PARAMETER	UNIT	TYPICAL	MIN	MAX	TEST METHOD
Assay (Titration)	%	90.746	90	91.5	Titration
Heavy Metals As Pb	ppm	3	—	10	ICP-MS (as Pb)
Iron	ppm	2.526	—	5	ICP
Sodium Na	ppm	5900.0	—	—	ICP-MS
Chloride (Cl ⁻)	ppm	210.0	—	1000.0	Ion chromatography
Phosphate	ppm	0.0006	—	0.5	Per specification
Sulfate (SO ₄ ²⁻)	ppm	0.0010	—	13	Ion chromatography
Carbonate	%	0.37	—	2	Titration
Nitrogen	ppm	6	—	20	Kjeldahl / Chemiluminescence

ND = Not Detected. Values are typical and may vary by lot.

PHYSICAL & CHEMICAL PROPERTIES

Appearance	White crystalline powder	Odor	Odorless
Form	Solid	Boiling Point	greater than 266 °F at 760 mmHg (USCG, 1999)
Melting / Freezing Point	680 °F approximately (NTP, 1992)	Specific Gravity	2.044
Solubility	Highly water-soluble, moderate alcohol solubility	Molecular Formula	HKO
Molecular Weight	56.106 g/mol	Density (25°C)	0.84 g/mL
Partition Coefficient (log P)	Not applicable (inorganic salt)		

APPLICATIONS

1. **Water Treatment** — Used effectively to neutralize acidic water and maintain optimal pH levels in various treatment processes.
2. **Chemical Manufacturing** — Acts as a powerful base in complex chemical reactions and large-scale synthesis applications.
3. **Consumer Goods** — Functions as a critical saponifying agent in the production of high-quality soaps and industrial detergents.
4. **Energy Storage** — Utilized as a high-performance electrolyte in the manufacturing of alkaline batteries.

STORAGE & HANDLING

Potassium Hydroxide is highly hygroscopic and caustic, meaning it must be stored in a cool, dry, and well-ventilated area to prevent moisture absorption and container degradation. Proper storage is critical to mitigate the risk of severe skin burns and eye damage associated with this hazardous material.

- Store in a cool, dry place away from moisture and incompatible substances.
- Use appropriate personal protective equipment (PPE) including gloves and goggles.
- Ensure containers are tightly sealed to prevent moisture absorption.
- Material compatibility includes HDPE and glass; avoid aluminum and zinc.

AVAILABLE PACKAGING

- 2 lbs.
- 5 Lbs.
- 55 Lbs.

SAFETY SUMMARY (CROSS-REFERENCE TO SDS)

Signal Word: **Danger**



Hazard Statements:

- H302: Harmful if swallowed [Warning Acute toxicity, oral]
- H314: Causes severe skin burns and eye damage [Danger Skin corrosion/irritation]

Emergency Contact: CHEMTEL - 800-255-3924 (24 Hours/Day, 7 Days/Week)

For complete safety information, refer to the Safety Data Sheet (SDS) for this product.

Alliance Chemical | 204 South Edmond St, Taylor, Texas 76574 | 512-365-6838 | www.alliancechemical.com

Disclaimer: The information contained herein is believed to be accurate and represents the best information currently available to us. However, Alliance Chemical makes no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes.